





Fast, elegant opening, with easy and safe installation

- The leaf secured inside the automation makes the lines extremely harmonious and simple.
- Built-in luminous crown, with modular assembly, warns of leaf movement and operating status.
- The control board, the power supply and the electric brake are inside the automation.
- The built-in electric brake blocks the leaf, allowing access to authorised users only.
- The motor with encoder enables easy management of the slowdown and obstacle detection stages.
- The programming and function display screen is located in an easily accessible place.
- Movement activation, via transponder card, magnetic card, buttons or photocells.
- Memory Roll for saving configurations and users.
- AISI 304 steel structure with plexiglas and tempered glass leaf.
- The speed of the leaf can be adjusted directly from the control board.

Dimensions (mm)

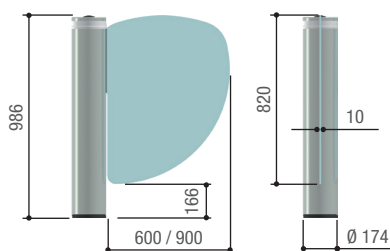

Operational Limits

MODEL	PSWNG40
Min. leaf length (mm)	600 (PSWL60 - PSWL60C)
Max. leaf length (mm)	900 (PSWL90 - PSWL90C)
Min. clearance width (mm)	1250
Max. clearance width (mm)	1850
Max. leaf opening (°)	90

Technical Features

MODEL	PSWNG40
Protection rating (IP)	40
Power supply (V - 50/60 Hz)	120 - 230 AC
Motor power supply (V)	24 DC
Capacity/min*	12
90° opening speed (s)	1
Power (W)	120
Operating temperature (°C)	-20 ÷ +55

* Detected in free access mode