




TIMER RELAY

ACCESSORIES

RGL has a broad range of accessories that complement our access control range.

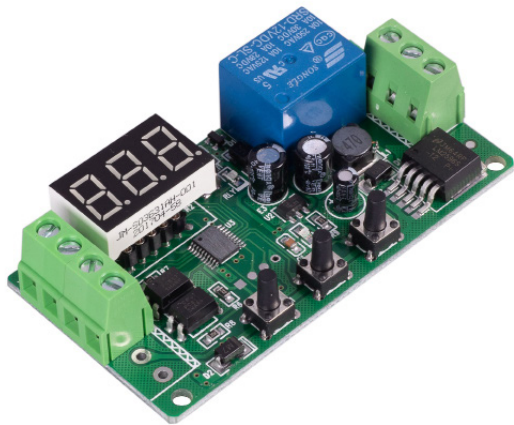

RL03-LED/12-24

SPECIFICATION	FEATURES	OTHER PRODUCTS
RL03-LED/12-24 • Timer relay unit • 12V & 24V DC • Contact rating 10A @ 125VAC or 10A @ 30VDC • NC/COM/NO • LED timer indication • Positive or negative trigger	RL03-LED/12-24 • Timer 0.1 to 999 seconds • Or 1 to 999 minutes • Operates on a positive or negative pulse Multiple different timer functions 1. Standard Time Delay 1a Timer does not reset 1b Timer resets countdown with each pulse 1c Timer can be toggled on/off 2. Timer delay to Relay operation (can be timed separately) 3. Automatic Timer (no trigger) 4. Resettable Timer 5. Automatic Timer or Triggered Timer	EBJS-01 WP-KS-1 ML600 DU-GB/PTE
DIMENSIONS	CONTENTS	
RL03-LED/12-24 • 76x40x17 (mm)	RL03-LED/12-24	

LRQA

CERTIFIED

ISO 9001

UKAS

MANAGEMENT SYSTEMS

0001

bsia

british security industry association

Manufactured by a BSIA Member