



TITLE:

Cat5e 4pr FTP Fire Resistant LSZH

CODE:

SFX/C5-FTP-FIRE-LSZH-RED-1000



DESCRIPTION:

1000m Category 5e, 4pr FTP Fire Resistant Red LSZH

SUPPLIED AS:

Reel of 1000m

- Capable of 100mbps transfer speed or 100mhz frequency at a maximum distance of 90 meters
- Screened for use where RF or Power equipment may produce electromagnetic interference. This is also a security measure should eavesdropping be apparent.
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Solid core is the most cost effective and commonly used type of cat5e cable

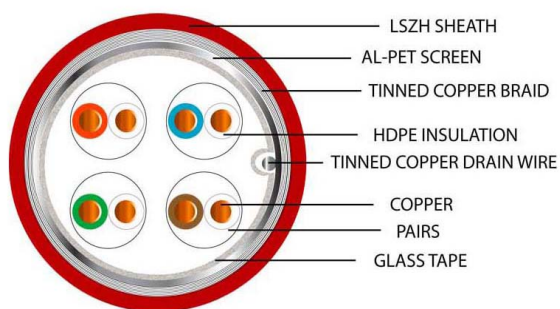



Product Specification



Cable Construction

CPR	LPCB
Conductor	Bare Copper
Conductor Diameter (mm)	0.625 ±0.01
Overall Diameter (mm)	10.00 ±0.20

Insulation

Insulation	HDPE
Insulation Colour	Clear (x8)
Insulation Thickness (mm)	0.1
Outer Insulation	Silicon Rubber
Outer Insulation Diameter (mm)	1.60 ±0.10
Outer Insulation Thickness (mm)	0.15

Outer/Jacket Specification

Outer Insulation	Silicon Rubber
Jacket	LSZH
Overall Colour	Red
Overall Diameter (mm)	10.00 ±0.20
Jacket Colour	Red RAL 3017
Jacket Thickness (mm)	1.35 ±0.20

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<70.70/km
Rated Temperature (°C)	-40°C to 70°C





NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim

ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

KNX

KNX

CDI

CPR

UK
CA