



NETWORK CABLE



Network cable

TITLE:

Cat5e 4pr UTP

CODE:



SFX/C5-UTP-LSZH-D-ORG-305

DESCRIPTION:

305m Category 5e, 4pr UTP Orange
LSZH

SUPPLIED AS:

Reel of 305m

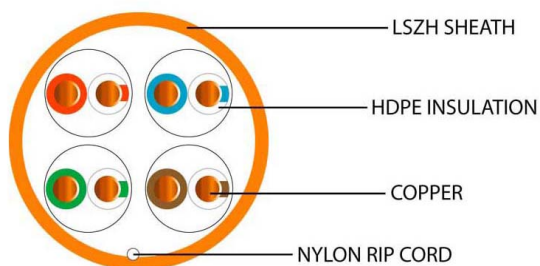

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

CPR	Dca -s2 -a1 -d2
Conductor	Bare Copper
Conductor Diameter (mm)	0.47 ±0.01
Overall Diameter (mm)	4.80 ±0.03

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Orange
Overall Diameter (mm)	4.80 ±0.03
Jacket Colour	Orange RAL 2003
Jacket Thickness (mm)	0.49 ±0.03
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<1150/km
Rated Temperature (°C)	-40°C to 70°C





NETWORK CABLE



MORE INFORMATION:

Sorry, no more information is available for this product

Network cable



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX

Drum-Roll

LUCKINS

epim

ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

KNX

KNX

CDI

CPR

UK
CA