



TITLE:

ISP Individual Foil Screen LSZH

CODE:



SFX/ISP2-LSZH-D-WHT-100

DESCRIPTION:

100m ISP2 2pr 22AWG Individual Foil
Screen 600V White LSZH (8723)

SUPPLIED AS:

Reel of 100m

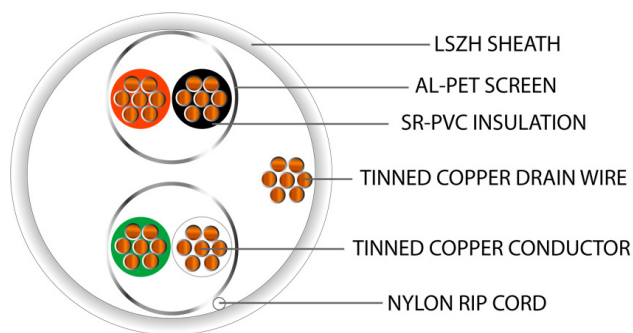

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification

Cable Construction

Cable Construction	2 Pairs
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7 (0.33mm ²)
Overall Diameter (mm)	4.10 ±0.20

Insulation

Insulation	PE
Insulation Colour	Red,Black;Green,White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.24

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	White
Overall Diameter (mm)	4.10 ±0.20
Jacket Colour	White RAL 9003
Jacket Thickness (mm)	0.45
Nylon Rip-Cord	White 210D

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<50O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V





**BELDEN
EQUIVALENTS**

Securi-Flex®

MORE INFORMATION:

Sorry, no more information is available for this product

Belden equivalents



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX®

Drum-R®

LUCKINS®

epim
putting data first

EDS ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

BSI
BSI
REGISTERED

KNX
MEMBER

cdi
Cable Design Institute

CPR
Cable Protection
Register

**UK
CA**