


STP-EB300VGL

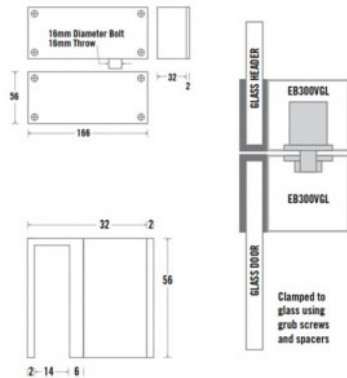

SURFACE GLASS MOUNT SOLENOID BOLT

This solenoid bolt is ideal for frameless glass doors with a glass header due to the clamp fixing method. Suitable for single or double action doors it includes door position monitoring and variable re-locking delay.

FEATURES

- Suitable for frameless glass doors and headers
- Fail safe (power to lock)
- Door position monitoring
- Variable re-lock delay
- Low holding current
- Anti-tamper design
- Suitable for single or double-action doors

TECHNICAL INFORMATION

- Max. glass thickness: 14mm
- Min. air gap required: 6mm
- Input voltage: 12Vdc $\pm 10\%$
- Activating current 900mA
- Holding current 300mA
- Bolt diameter 16mm
- Bolt throw 16mm
- Monitoring contacts: SPDT (COM, NO, NC) rated 250mA @ 30Vdc
- Operating temp: -10°C to 45°C
- Humidity: 0~95% non-condensing

RELATED PRODUCTS



STP-GDR



STP-NT200-S



STP-PSU1A-12



STP-EBGDN