


STP-EM05DS

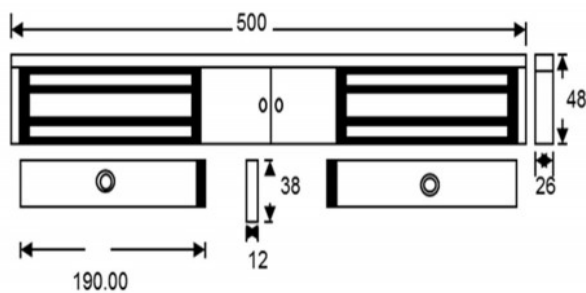

SLIM MONITORED DOUBLE MAGLOCK WITH DOOR STATUS MONITORING

The compact design makes this lock ideal for most indoor applications where 275kg holding force is sufficient. LED lock monitoring and relay contacts for signalling. This model includes door status monitoring contacts to monitor each door position.

FEATURES

- MOV provides spike and surge protection
- Fail-safe operation (power to lock)
- Anti-residual magnetism protection
- Top-plate, armature-plate and fixings included
- Slim design
- Dual voltage 12Vdc or 24Vdc (selectable)
- Surface mount
- Silver anodised aluminium finish
- Lock monitoring
- Door status monitoring

TECHNICAL INFORMATION

- Holding force: up to 275kg (600lb) per side
- Current draw = 500mA @ 12Vdc / 250mA @ 24Vdc per side
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Humidity: 0-95% non-condensating
- Weight: 4kg approx.
- Red/green LED indicator (one per side)
- Relay : COM/NO/NC (1A@ 24Vdc) (one per side)
- Reed switch door contact (one per side)

RELATED PRODUCTS



STP-EM02DS



STP-EM300AZLG-DC



STP-EM300CL



STP-SPB009S