

STP-SL183




12VDC MONITORED MICRO SHEARLOCK WITH AUTO RE-LOCK

This shearlock is ideal for single action or double action doors. The shear locking action requires an extremely high force to overcome and mortice installation provides a concealed finish.

FEATURES

- Auto relock with adjustable time delay 0.5-25 seconds
- Lock monitoring
- Door status monitoring
- Recommended for horizontal mount
- Mortice fitting
- Fail-safe

Dimensions:

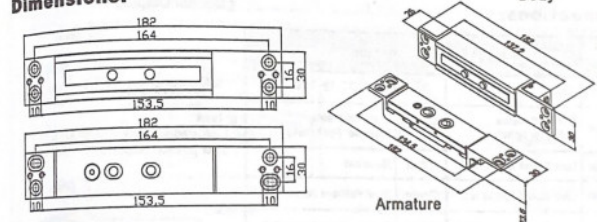

TECHNICAL INFORMATION

- Up to 1200kg (2600lb) holding force
- Voltage: 12-24Vdc
- Operation current:
900mA@12Vdc
900mA@24Vdc
- Holding current:
220mA@12Vdc
190Ma@24Vdc
- Magnetic distance (max)
3mm @ 12Vdc
5mm @ 24Vdc
- Monitoring relay: NO and NC contacts
- Rating: 24V/1A
- Fail-safe
- LED indicator included - Optional install

RELATED PRODUCTS



STP-GS200M



STP-SL183GH



STP-SL183H



STP-SL705-30