



TM.ONTEC R M1U 301 NM ST



Catalog number	TM-OR.MUSTN300W
Application	anti-panic lighting
Duration time	3 h
Operating mode	NM
Version	ST – for button test
Colour	RAL9003
Luminous flux	158 lm
Maximum light power (the luminaire can power the light source with a different power)	2 W
Active power	1.7 W
Power supply	210+250 V AC 50+60 Hz
Power supply CB	186+254 V DC
Dimming mode	no
Temperature range	10-35 °C
Material	PC
IP	IP20
IK	IK03
Battery	LiFePO4/C 3.2V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
Appliance classes	2



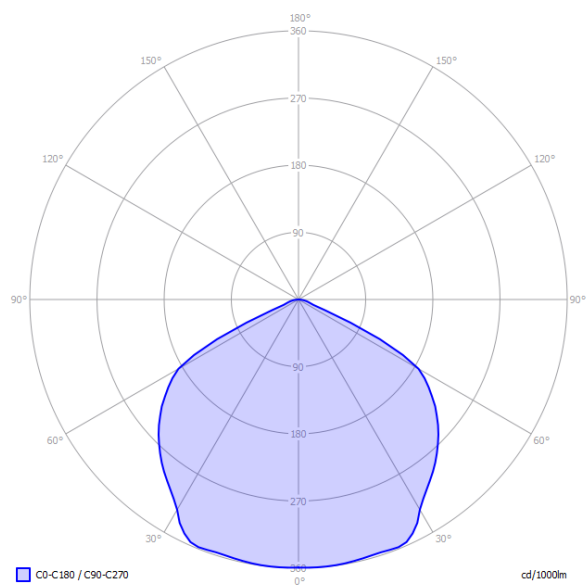

PHOTOMETRY [m]

Ceiling height	Distance wall - fitting	Distance fitting - fitting
2,5	3,4	7,7
3,0	3,6	8,8
4,0	3,8	10,5
5,0	4,0	11,8
6,0	3,8	12,5
7,0	3,7	12,9
8,0	3,6	13,2
9,0	3,4	13,0
10,0	3,1	12,5

