




TM.ONTEC S30 M5 180 NM AT

TM-S3.M5ATN360W

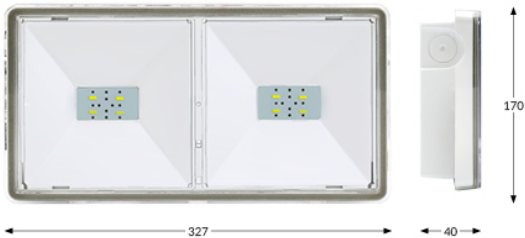

PARAMETERS

60/180	default 1h M/NM possibility change to 3h M/NM
Application	anti-panic lighting
IP	IP65/IK08
IK	IK08
Version	AT - auto-test / self-test
Power supply	210÷250 V AC 50÷60 Hz
Temperature range	5-40 °C
Material	PC
Colour	RAL9003
Duration time	3 h
Operating mode	NM
Maximum light power (the luminaire can power the light source with a different power)	5.8 W
Active power	4.01 W
Insulation class	2
Battery	2xLiFePO4/C 6.4V 3.0Ah
Dimming mode	no

