

# TVB-5711

**TruVision IP Bullet Camera, 2MP, Super Low Light, 2.8 to 12 mm lens, 50 m IR, PoE+ (802.3-at)/12 VDC, Heater, IP67, IK10**

## Overview

---

The TruVision Series 7 IP bullet cameras with smart event capabilities available in 2, 4, 8 and 12MP resolution deliver high-quality images thanks to their extreme low light sensitivity and enhanced image processing. The rich set of features make these cameras the ideal choice for demanding security, surveillance and monitoring applications.

The cameras support up to 10 configurable video streams which allow users to optimize the camera's remote live view capabilities while controlling the bandwidth usage. The motorized varifocal lens with P-iris technology allows users to remotely adjust the zoom level and focus to get crisp images anytime anywhere. In addition to the compatibility with other TruVision products and 3rd party VMS software, the cameras also support NAS recording or local MicroSD card recording to protect data in the event of network disruptions.

The enhanced embedded video intelligence capabilities go above and beyond standard event detection allowing operators to receive real-time event notifications and reduce the time needed for post-incident investigation.



## Details

---

- Maximum resolution: 1920 x 1080
- H.265, H.264 and MJPEG compression
- 10 independent configurable video streams
- Motorized zoom lens 2.8 to 12 mm with auto-focus
- P-iris lens
- ONVIF Profiles S, G and T
- Rich video intelligence (VCA)
- Up to 50 m IR illumination
- Up to 140 dB Wide Dynamic Range
- Edge recording up to 256 GB with optional SD card

# TVB-5711

TruVision IP Bullet Camera, 2MP, Super Low Light, 2.8 to 12 mm lens, 50 m IR, PoE+ (802.3-at)/12 VDC, Heater, IP67, IK10

## Technical specifications

### General

|                        |                                                                                     |
|------------------------|-------------------------------------------------------------------------------------|
| Technology             | IP                                                                                  |
| Video standard         | NTSC, PAL                                                                           |
| Image settings         | De-Fog, Electronic Image Stabilization, Hallway View, Mirror                        |
| Privacy masking        | 8 zones                                                                             |
| Video output           | BNC (for installation only)                                                         |
| Software compatibility | Milestone XProtect, OnGuard, TruVision Navigator, TVRmobile, UltraView, Web Browser |

### Camera

|                 |                  |
|-----------------|------------------|
| Sensor size     | 1/1.8"           |
| Max. resolution | 2 MP             |
| Sensor scan     | Progressive      |
| Sensor type     | CMOS             |
| Shutter time    | 1 to 1/100,000 s |

### Lighting performance

|                         |                                               |
|-------------------------|-----------------------------------------------|
| WDR type                | True WDR                                      |
| WDR                     | 140 dB                                        |
| Digital noise reduction | 3D DNR                                        |
| Day/night               | True Day/Night                                |
| Motorized IR cut filter | Yes                                           |
| Color sensitivity       | 0.002 Lux @ (F1.2, AGC ON)                    |
| B/W sensitivity         | 0.0002 Lux @ (F1.2, AGC ON), 0 lux with IR ON |
| B/W trigger             | Auto/Schedule/Triggered by alarm in           |
| Infrared (IR)           | Yes                                           |
| IR range                | Up to 50 m                                    |

### Encoding

|                                |                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------|
| Video streams                  | 10                                                                                           |
| Main stream compression        | H.264, H.265                                                                                 |
| Sub stream compression         | H.264, H.265, MJPEG                                                                          |
| Third stream compression       | H.264, H.265, MJPEG                                                                          |
| Video bit rate                 | 32 to 16 Mbps                                                                                |
| Main stream resolutions        | 1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p)                                    |
| Sub stream resolutions         | 640 x 480 (VGA), 704 x 576 (4CIF)                                                            |
| Third stream resolutions       | 1280 x 720 (XVGA), 1280 x 960 (720p), 1920 x 1080 (1080p), 640 x 480 (VGA), 704 x 576 (4CIF) |
| Max. resolution @ fps          | 1920 x 1080 @ 25/30 fps                                                                      |
| 4th to 10th stream compression | H.265, H.264, MJPEG                                                                          |
| 4th stream resolutions         | 1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)                    |
| 5th stream resolutions         | 704 x 576 (4CIF), 640 x 480 (VGA)                                                            |
| 6th to 10th stream resolutions | 1920 x 1080 (1080p), 1280 x 720 (XVGA), 704 x 576 (4CIF), 640 x 480 (VGA)                    |

### Lens

|                |                                                                                                         |
|----------------|---------------------------------------------------------------------------------------------------------|
| Lens type      | Varifocal motorized                                                                                     |
| Focal length   | 2.8 to 12 mm / Horizontal FoV 103.3°to 38.6°, Vertical FoV 54.2° to 21.9°, Diagonal FoV 124.2° to 44.3° |
| Auto iris      | Yes                                                                                                     |
| Auto focus     | Yes                                                                                                     |
| Motorized zoom | Yes                                                                                                     |
| Auto-iris      | P-iris                                                                                                  |

### Network

|                             |                                                                                                                                                                                                                                                                                               |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network interface           | RJ-45 10/100 Mbps self-adaptive Ethernet interface                                                                                                                                                                                                                                            |
| Integration                 | CGI, ISAPI, ONVIF Profile G, ONVIF Profile S, ONVIF Profile T                                                                                                                                                                                                                                 |
| Supported network protocols | 802.1x, Bonjour, DDNS, DHCP, DNS, FTP, HTTP, HTTPS, ICMP, IGMP, IPv4, IPv6, NTP, PPPoE, QoS, RTCP, RTP, RTSP, SMTP, SNMP, TCP/IP, UPnP                                                                                                                                                        |
| Security                    | Password protection, HTTPS encryption, 802.1x authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for ONVIF, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.2 |

### Audio

|                   |                                                       |
|-------------------|-------------------------------------------------------|
| Audio compression | G.711alaw, G.711ulaw, G.722.1, G.726, MP2L2, MP3, PCM |
| Audio in          | 1 line in/mic.in                                      |
| Audio out         | 1 line out                                            |

### Alarm I/O

|                      |                                |
|----------------------|--------------------------------|
| Alarm inputs         | 2                              |
| Alarm outputs        | 2 outputs (24 VAC/VDC, 1A max) |
| Alarm I/O connection | Terminal blocks                |

### Storage

|                            |                                       |
|----------------------------|---------------------------------------|
| Local storage support      | Yes                                   |
| Local storage type         | Built-in Micro SD/SDHC/SDXC card slot |
| Max. SD card capacity      | 256 GB                                |
| Additional storage options | NAS (NFS,SMB/CIFS)                    |

### Video intelligence

|               |                                                                                                                                                                                                                                                                  |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm trigger | HDD error, HDD full, Invalid login, IP address conflict, Network disconnected                                                                                                                                                                                    |
| ROI           | Up to 4 fixed regions for one of 5 the first streams<br>Dynamic region for face tracking                                                                                                                                                                         |
| Smart event   | Advanced motion detection, Audio exception detection, Defocus, Face detection, Intrusion detection, Line crossing detection, Object removal detection, Region entrance detection, Region exiting detection, Scene change detection, Unattended baggage detection |

# TVB-5711

TruVision IP Bullet Camera, 2MP, Super Low Light, 2.8 to 12 mm lens, 50 m IR, PoE+ (802.3-at)/12 VDC, Heater, IP67, IK10

### Electrical

|                   |                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating voltage | 12 VDC $\pm$ 20%, three-core terminal block, reverse polarity protection / PoE (802.3at, class 4)                                                                                                                                         |
| Power consumption | 12 VDC, 1.13 A, max. 13.5 W; PoE (802.3at, 42.5 V to 57 V), 0.42 A to 0.32 A, max. 18 W<br>With external load connected to camera power output: 12 VDC, 1.33 A, max. 15.9 W; PoE (802.3at, 42.5 V to 57 V), 0.50 A to 0.37 A, max. 21.2 W |

### Physical

|                     |                                              |
|---------------------|----------------------------------------------|
| Physical dimensions | $\Phi$ 144 x 347 mm<br>$\Phi$ 5.7 x 13.7 in. |
| Net weight          | 2450 g<br>5.40 lb.                           |
| Colour              | Grey                                         |
| Form Factor         | Bullet                                       |

### Environmental


|                       |                               |
|-----------------------|-------------------------------|
| Impact rating         | IK10                          |
| Environment           | Outdoor                       |
| Operating temperature | -40 to +65°C<br>-40 to +149°F |
| Relative humidity     | <95% noncondensing            |
| IP rating             | IP67                          |
| Internal heater       | Yes                           |

### Regulatory

|            |                                |
|------------|--------------------------------|
| Compliance | CE, FCC, REACH, RoHS, UL, WEEE |
|------------|--------------------------------|

### Accessories

|        |                                                             |
|--------|-------------------------------------------------------------|
| TVB-CM | TruVision Corner Mount bracket for S6 and S7 bullet cameras |
| TVB-PM | TruVision Pole Mount bracket for S6 and S7 bullet cameras   |

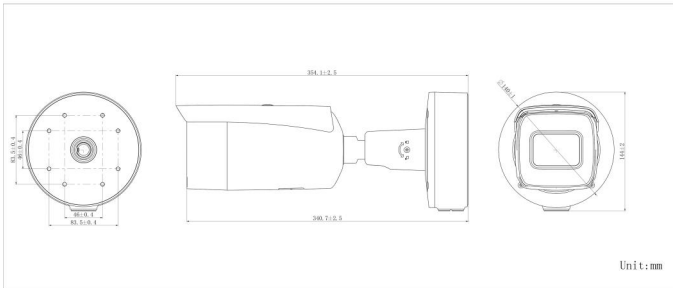

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 December 2023 - 17:54