


TVD-CB5A Cup Base Installation Instructions

Specifications

Dimensions:

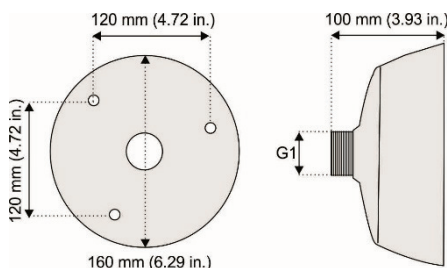


Weight: 382 g (13.47 oz.)

Accessories:

Rubber ring: 1 pcs

Used to prevent moisture from entering between the dome camera and the cup base.



- TVD-5407
- TVD-5408

Installing a TVD-CB5A cup base to a dome camera


When assembling a TVD-CB5A cup base to a dome camera, you require:

- TVD-CB5A cup base
- Rubber ring

Note: You will need to remove the dome back box from the dome camera. It is not required when installing in a cup base.

To mount a TVD-CB5A cup base to a dome camera:

1. Screw the cup base onto the swan neck or pendant mount and fasten with the locking screw (pendant mount shown as an example below).




2. Remove the back box from the dome camera. It is not required when installing in a cup base.

Supported devices:

- TVD-5404
- TVD-5405
- TVD-5406

3. Make sure that the rubber ring is firmly in place between the cup base and the dome housing.
4. Using the screws that are provided with the dome, install the dome assembly to the cup base.
5. Refer to the TruVision swan neck or pendant mount installation manual for instructions on installing a mount to the dome camera (swan neck assembly shown).



Australian/New Zealand:
<https://firesecurityproducts.com.au/>

Product documentation

Please consult the following web link to retrieve the electronic version of the product documentation. The manuals are available in several languages.



Legal and regulatory information

Copyright

© 2021 Carrier. All rights reserved.
Specifications subject to change without prior notice.

Trademarks and patents

TruVision names and logos are a product brand of Aritech, a part of Carrier. Other trade names used in this document may be trademarks or registered trademarks of the manufacturers or vendors of the respective products.

Certification



Contact information

EMEA: <https://firesecurityproducts.com>