


WB1-HF

Cable Belden 9504 Cca grade (500m rolls)

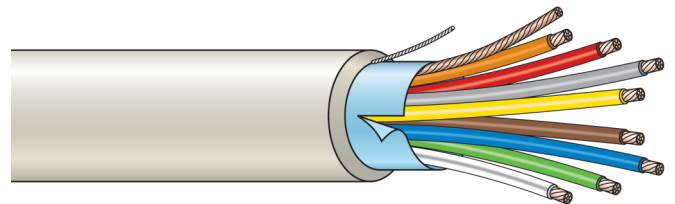

Details

- For internal or external wiring of warning network systems
- Halogen free and CCa graded
- Suitable for gluing to surfaces

WB1-HF

Cable Belden 9504 Cca grade (500m rolls)

Technical specifications

Shielding

Shielded	No
Insulation type	semi-rigid insulation

Core

Conductor size	0.6 mm ²
Conductor material	Tinned copper wired, 7 strand
Wire colours	Black, Green, Blue, White, Red

Jacket

Jacket colour	White
Jacket thickness	Min. 0.45 mm - max. 0.7 mm

Electrical characteristics

Test voltage	2000
Current rating	1A
Max.conductor DC resistance	25 ohm/km at +20°C
Nominal (mutual) capacitance	150 pF/m
Structural return loss	46

Physical

Cable length	500 m
No. of wires	4
Weight	46 kg/km

Environmental

Halogen free	Yes
Operating temperature	-30 to 80C
Environment	Indoor

Regulatory

Compliance	CE
Standards	CPR Class CCA



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 31 August 2023 - 15:54