


# WC104W

**Shielded Composite 2 + 2 Cable 2 x 0.75**

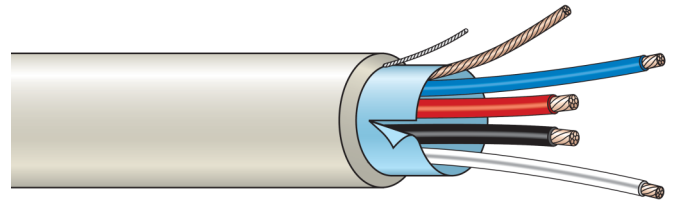

## Details

---

- For internal or external wiring of warning network systems
- Manufactured in accordance with BS4737 section 3.30
- Suitable for gluing to surfaces
- High quality PVC

# WC104W

## Shielded Composite 2 + 2 Cable 2 x 0.75

### Technical specifications

#### Shielding

|          |     |
|----------|-----|
| Shielded | Yes |
|----------|-----|

#### Core

|                    |                                                            |
|--------------------|------------------------------------------------------------|
| Conductor size     | 0.22 mm <sup>2</sup> (data) - 0.75 mm <sup>2</sup> (power) |
| Conductor material | Plain copper                                               |
| Wire colours       | Red, Black (power)<br>Blue, White (data)                   |

#### Jacket

|                  |                                                      |
|------------------|------------------------------------------------------|
| Jacket colour    | White                                                |
| Jacket thickness | Min. 0.45 mm <sup>2</sup> - max. 0.7 mm <sup>2</sup> |

#### Electrical characteristics

|                              |                     |
|------------------------------|---------------------|
| Current rating               | 1 A                 |
| Max.conductor DC resistance  | 92.4 ohm/km @ +20°C |
| Nominal (mutual) capacitance | 90 pF/m             |

#### Physical

|              |       |
|--------------|-------|
| Cable length | 100 m |
| No. of wires | 4     |

#### Environmental

|              |    |
|--------------|----|
| Halogen free | No |
|--------------|----|

#### Regulatory

|            |    |
|------------|----|
| Compliance | CE |
|------------|----|



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](https://firesecurityproducts.com) online or contact your sales representative.

Last updated on 5 May 2023 - 9:28