
41IOM040

ADDRESSABLE MODULE WITH 4 INPUTS

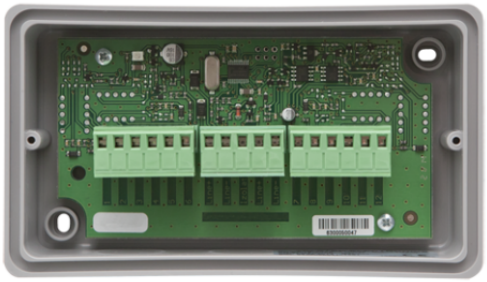

The addressable module 41IOM040 controls four balanced inputs. It is powered from the loop and is controlled by the control panel by means of the communication protocol. The module comes in a plastic container which is suited to wall mounting; it has a transparent plastic cover for easy visual inspection. Approved to EN 54-17 and EN 54-18.

41IOM040

ADDRESSABLE MODULE WITH 4 INPUTS

MAIN FEATURES	
Isolator	Yes
EN regulations	EN54-17, EN54-18

HARDWARE SPECIFICATIONS	
Height (mm)	80
Width (mm)	142
Depth (mm)	45
Type of finishing materials	ABS
Product color	Branco, cobertura transparente
Product weight (g)	230
Operating temperature (°C)	-10 ÷ 60
Operating humidity (RH max @40°C) (%)	0 ÷ 96
Cross-section for terminals (mm)	0.4 ÷ 2.5

ELECTRICAL SPECIFICATIONS	
Supply voltage	15÷32VDC
Absorption in stand-by (mA)	0.3
Rated absorption	330uA@27VDC
Absorption with 1 LED ON (mA)	4
Number of supervised inputs (n°)	4

GENERAL DATA	
IP protection rating	IP21

The technical specifications are subject to change without prior notice.