

Surface Magnetic Contact


Code: SC570/WH/MULTI

SC570 | Surface Contact | Grade 2 | White | Multi Resistored

This magnetic door contact can be used in most security systems up to and including grade 2 and environmental class II as specified in EN50131-1 and is certified to EN50131-2-6 by Kiwa FSS. This contact can be used on windows and doors to detect the unauthorised entry of an intruder. The contact is also protected against tampering with optional detection of removal from its mounting surface.

Features & Benefits

- 3 Terminals
- Microswitch wall tamper
- Available in white or brown
- Selectable end of line resistor
- EN50131-2-6 Grade 2
- Environmental Class II

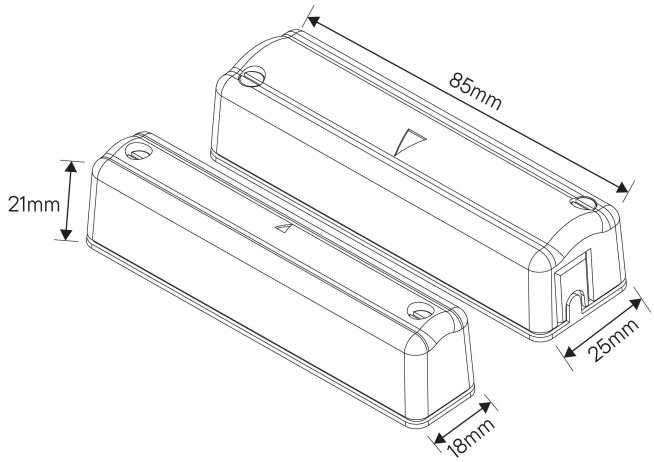

Product Information

Security Grade	2

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH

Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27

Environmental Class	Class II
Standards	EN50131-1, EN50131-2-6, EN50130-5
Tamper Protection	Cover & RFMS
Connection type	Wired

Housing

Colour	White
Material	HIPS
Contact Dimensions (mm)	85 x 25 x 21
Magnet Dimensions (mm)	85 x 18 x 21

Electrical

Connection type	Wired
No. of terminals	3 Terminal
Contact type	Normally Closed
Contact Material	Rhodium

Features

Mode of operation	EOL/ FSL
Resistor Type	A, B, D, E, F, H & I
Operation Axes (X, Y, Z)	X, Y
Pull-in gap (X, Y, Z)mm	36, 27
Suitable for Double Door	Yes
No. of terminals	3 Terminal

CQR Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH

Sales: +44(0)151 6061000 (9am to 5pm Monday to Friday) **Tech:** +44(0)151 606 6311

sales@cqr.co.uk | www.cqr.co.uk

Company Registration Number: 5192024 | VAT Number: 309 0409 27

This document is uncontrolled if printed, all information is subject to change. Generated on 6/27/2025 9:11:01 AM