


DATASHEET



TORCDAST6

230V IP65 IK08 6ft 65W DALI CCT Adjustable ST
Emergency Non-Corrosive

www.mlaccessories.co.uk

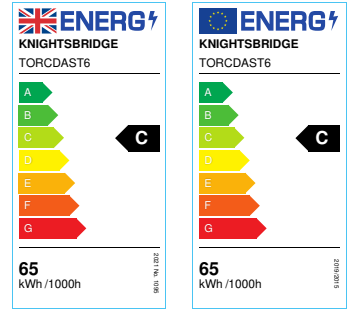

MLA PART CODE	TORCDAST6
DESCRIPTION	230V IP65 IK08 6ft 65W DALI CCT Adjustable ST Emergency Non-Corrosive
NET WEIGHT (KG)	2.84
FINISH	Grey
DIFFUSER	Opal
DIMENSIONS (MM)	Length - 1828 Height - 90 Width - 90 Projection - 90
CONSTRUCTION	Construction - Polycarbonate
CLASS	I
IP RATING	IP65
IK RATING	IK08
WATTAGE (W)	65
LAMP TECHNOLOGY	SMD LED
LAMP INCLUDED	Yes
LUMENS (LM)	8900
LUMENS LIGHT SOURCE ONLY (LM)	10100
LUMEN TOLERANCE	5%
EFFICACY (LM/W)	140
LUMENS EMERGENCY MODE (LM)	385
CIRCUIT WATTAGE (W)	64
CCT	3000/4000/5700K
LIGHT COLOUR	CCT
CRI	>85
SDCM	<6
RUNNING CURRENT (A)	0.29
DISPLACEMENT FACTOR	>0.9
SVM	0.022
PST-LM	0.034

BEAM ANGLE (DEGREES)	120
LIFE SPAN (HRS)	50,000
L70B50 LIFESPAN (HRS)	60000
EMERGENCY	Maintained / Non-maintained / Switched
SELF-TEST	Yes
OPERATING TEMPERATURE	-5~35°C
INPUT VOLTAGE	230V 50Hz
CABLE ENTRY (MM)	20
CABLE GLAND INCLUDED	Compression gland
DRIVER	DRIVER TYPE - DALI MAX. OUTPUT - 84W OUTPUT VOLTAGE - 25-42V OUTPUT CURRENT - 1550mA POWER FACTOR - 0.9 EFFICIENCY FULL LOAD - 89.5 ISOLATION - SELV AMBIENT TEMPERATURE (Ta) - 50°C CASE TEMPERATURE (Tc) - 90°C
BATTERY TYPE	LiFePO4
BATTERY INCLUDED	Yes
STANDBY POWER	0.5W
WARRANTY	5year(s)
WARRANTY INFORMATION	(excluding battery)
MANUFACTURED IN ACCORDANCE WITH	BS EN 60598
ORIGIN OF MANUFACTURE	China
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes
EAN	5056270851786

Date Created: 27/02/2025 19:28

