

## DS-K1F600U-D6E-F Enrollment Station



The enrollment station can realize multiple user information's enrollment on one device. It supports enrolling face picture, fingerprint (parts of the device model support), 13.56 MHz IC card No., and 125KHz ID card No.

- 3.97-inch LCD touch screen for face recognition, parameters configuration, live view, etc.
- 2 MP wide-angle dual-lens
- Face anti-spoofing, Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- Face recognition duration < 0.2 s/User; face recognition accuracy rate ≥ 99%
- 2,000 user capacity, 2,000 face capacity, 20,000 card capacity, and 20,000 fingerprint capacity
- Enrolls data via the device and transmits the data from the device to the platform via TCP/IP/Type C USB interface; Enrolls data remotely via the client software
- Stand-alone operation: Manage, search and set device data after logging in the device locally






## ▪ Specification

<b>System</b>	
Operating system	Linux
<b>Display</b>	
Screen size	3.97-inch
Operation method	Touch
Type	Capacitive
Resolution	800 × 480
<b>Video</b>	
Lens	2
Resolution	2 MP
WDR	Support
<b>Network</b>	
Wired network	TCP/IP
Wi-Fi	Support
<b>Interface</b>	
USB	Supports 1 USB interface and 1 Type C USB interface (Type C USB interface is used for communicating with the platform.)
<b>Capacity</b>	
User capacity	2000
Face capacity	2000
Fingerprint capacity	20,000 (10 fingerprints per person)
Card capacity	20,000 (The displayed capacity on the device screen varies according to the configured enrollment rules)
Event capacity	2000 offline enrollment records
<b>Authentication</b>	
Face recognition distance	0.3 m to 1.5 m
Card type	EM card, Mifare 1 card, DESfire card, Felica card
Card reading frequency	13.56MHz, 125KHz
Card reading distance	0 to 5 cm
<b>Function</b>	
Face anti-spoofing	Support
Audio prompt	Support
Time synchronization	Support
<b>General</b>	
Power supply	12 VDC, 15 W, Round
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90%
Dimensions	121.6 mm × 137.9 mm × 125 mm (4.8" × 5.4" × 4.9")
Installation	Base mounting
Application environment	Indoor

▪ Available Model

DS-K1F600U-D6E-F

▪ Dimension

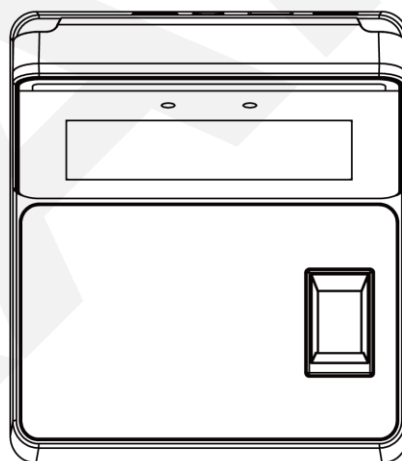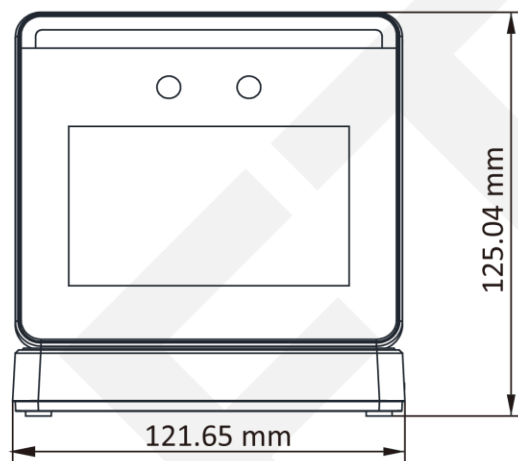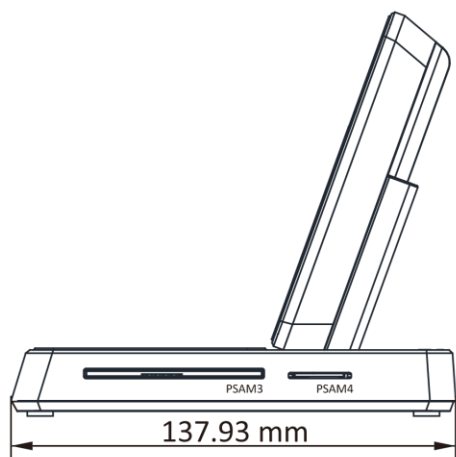

DR

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**

T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**

T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**

T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**

T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**

T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**

T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**

T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**

T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**

T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**

T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**

T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**

Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**

T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**

T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**

T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**

T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**

T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**

T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**

T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**

T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**

T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**

T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**

T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**

T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**

sales.colombia@hikvision.com