

## DS-KB8113-IME1(B) Vandal-Resistant Door Station



The KB8 vandal-resistant door station, designed with metal, helps to provide a safety environment with high resolution camera. It support physical doorbell, which is convenient for calling. You can also view, chat with, and send permission for the visitor via mobile phone in anywhere. The device is powered by the standard PoE, and is no need to wire extra power supply, which is easy for installation and deployment. With IK09 and IP 65 high protective levels, it is safe and suitable for high-end apartment, villa, government building, construction sites, etc.

- 2MP HD Camera with IR supplement providing excellent image quality
- Supports standard POE power supply
- Supports mechanical doorbell, easier to call
- Convenient Hik-Connect APP Mobile Control: Receive calls, open the door and live view remotely
- Supports web configuration
- Higher protection level: IK09 & IP65

## ▪ Specification


System parameters	
Operation system	Embedded Linux operation system
ROM	32 M
RAM	256 M
Processor	Embedded MCU Processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream : 1920 × 1080 Sub stream : 640 × 480
FOV	Horizontal:95° Vertical:54°
Wide dynamic range (WDR)	Support
Supplement light	IR supplement
Video compression standard	H.264
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U , G.711 A
Audio output	Built-in loudspeaker (More than 80 dB within 30 cm)
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Face capacity	/
Card capacity	/
Linked indoor station capacity	1
Sub door station capacity	16
Network parameters	
Network protocol	TCP/IP, RSTP, SIP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	1
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
Lock control	1 relay, Max. to 30 VDC, 2 A)
General	
Button	1
Installation	Surface mounting

Weight	Net Weight: 0.795 kg Gross Weight: 0.992 kg
Protective level	IP65, IK09
Working temperature	-30 °C to 50 °C(-22 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	161.85 mm × 74.13 mm × 53.2 mm(6.37" × 2.92" × 2.09")
Battery	/
Power supply	12 VDC, IEEE802.3af, standard PoE
Application environment	Outdoor and Indoor
Power consumption	< 10 W
Language	English,French,Portuguese,Spanish,Russian,German,Italian,Polish,Arabic,Turkish,Vietnamese,Hungarian,Dutch,Romanian,Czech,Bulgarian,Ukrainian,Croatian,Serbian,Greek,Slovakia,BrazilianPortuguese

## ▪ Available Model

DS-KB8113-IME1(B)

## ▪ Dimension

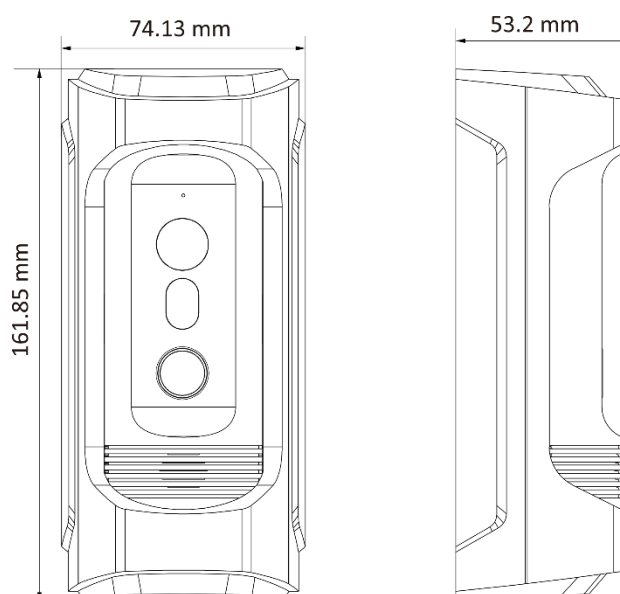

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

