



ENER-J[®]

Smart Home Living

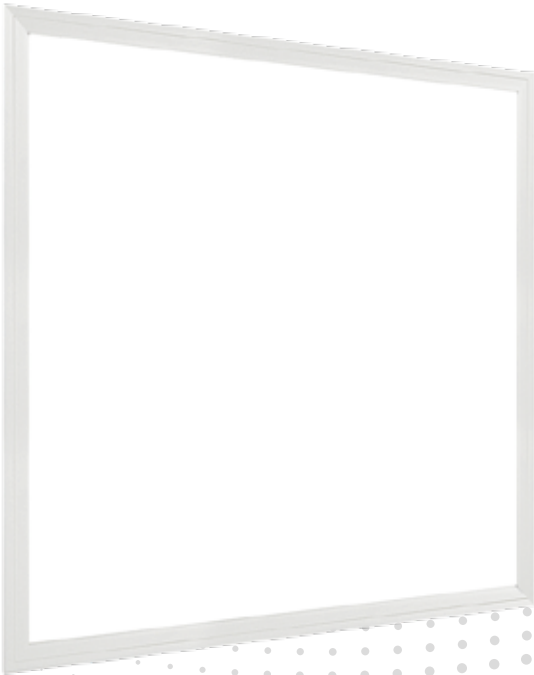

CCT Selectable LED Ceiling Panel, 60x60cms

Edge Lit Design, 40W, 3600Lm, Select 6000K to 4000K to 3000K via switch on the Driver

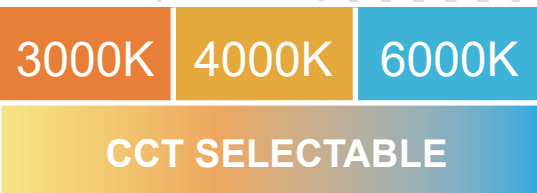

SKU CODE:
E115

Ean Code on box:
5060774559178

CERTIFICATIONS:
CE

Packing


Inner Qty
1pcs / pack

Outer Carton Qty
6pc / Carton

ENER-J[®]


Smart Home Living

CCT Selectable LED Ceiling Panel, 60x60cms

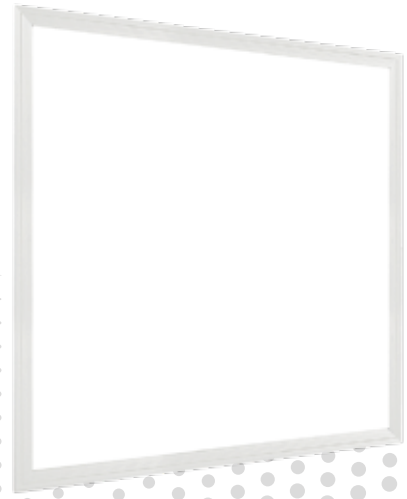

Features:


- **Energy Saving LED Lighting:** Ideal for replacing 60x60cm false ceiling tiles & energy-consuming fluorescent tube hanging lights.
- **CCT SWITCH ON DRIVER** - Select your preferred LED colour from 3000K (Warm white), 4000K (Cool ,white) and 6000K (Daylight) via a simple driver switch.
- **Flicker Free LED Driver** with 3 years warranty
- **High brightness:** 40W with 3600 Lumen brightness, replacing 80W equivalent Ceiling Light
- **VERSATILE DESIGN** - Ultra Slim design, a fantastic spread of light making them ideal for commercial ceiling light
- **Applications:** Ideal for offices, meeting rooms, corridors, industrial units, shops, class rooms and homes

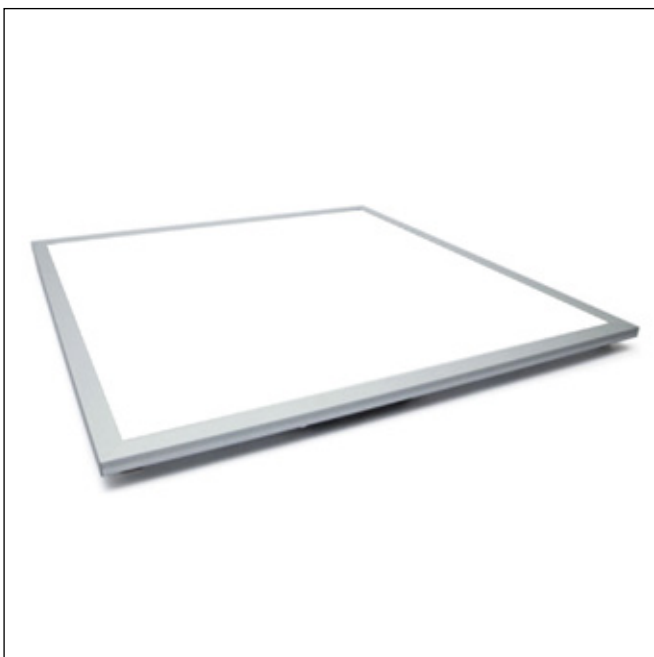

ENER-J®

Smart Home Living

CCT Selectable LED Ceiling Panel, 60x60cms

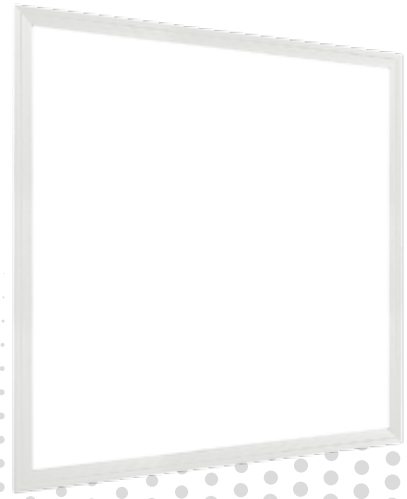


Specifications:

Body	
Frame:	Aluminum
Diffussor:	PP
LGP	ANTI UV PS
Reflective sheet:	PET188
Backcover filling:	FOAM
Backcover:	IRON
Body wire-0.3mm ² , CLASS II, Body connection is DC Male, 0.3*3mm ²	
Installation type:	Recessed (Surface Mounting Frames and Hanging Kits available separately)
Driver	
Driver type:	External
Driver:	AGT CCT selectable External constant current, isolated with emc/CE, No flickering
Driver connector:	Female,0.3*3mm ²
Shell material:	Plastic
Output:	27-40V 1000MA
Protection:	Short circuit protection
Hi-pot:	AC to DC Pass 3.0kv hi-pot
LEDS	
PCB:	Aluminum
LEDs	204PCS+204PCS ; SMD4014; 0.2W/LED

ENER-J®

Smart Home Living

CCT Selectable LED Ceiling Panel, 60x60cms

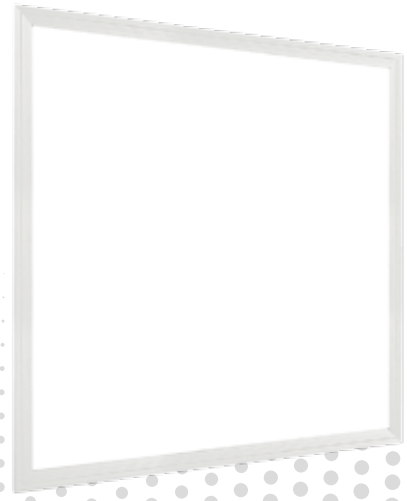


SIZE	
Body weight(N.W.)	0.5KGS
Body size :	595*595*23MM
ELECTRICITY PARAMETERS	
Input voltage :	AC220-240V 50/60HZ
Power:	40W±2W
PF:	> 0.9
Starting time:	< 0.5s
Dimmable:	no
PHOTOMETRIC PARAMETERS	
Flux lumens:	3600LM
Efficiency:	85LM/W
CRI:	Ra>80
SDCM:	<6
Beam angle:	120°
IRF,UGR request:	IRF<5%
Luminous Decay :	after 1000H, decay<10%
Operating temperature range:	-20°C-40°C
Lifetime:	30,000hrs
Warranty:	3 years


ENER-J®

Smart Home Living

CCT Selectable LED Ceiling Panel, 60x60cms

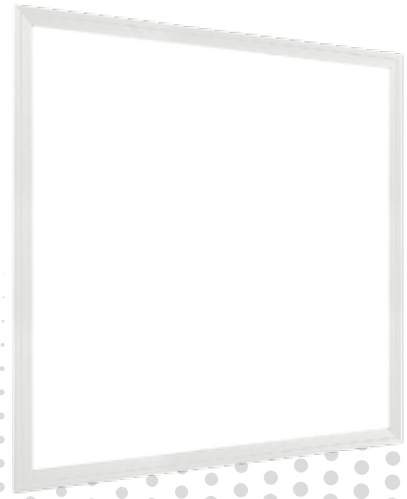


SAFETY	
IP grade:	IP20
Insulation class:	CLASS II
Body Hi-pot:	1.5KV
CERTIFICATION	
Certification:	CE, RoHS and UKCA
CCT	
CCT:	3000K-4000K-6000K selectable
BODY COLOR	
Body color:	White

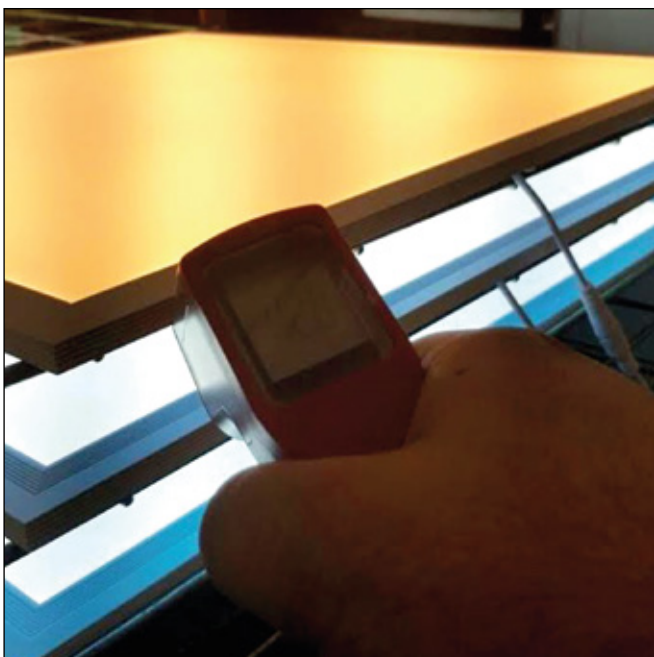

ENER-J®

Smart Home Living

CCT Selectable LED Ceiling Panel, 60x60cms

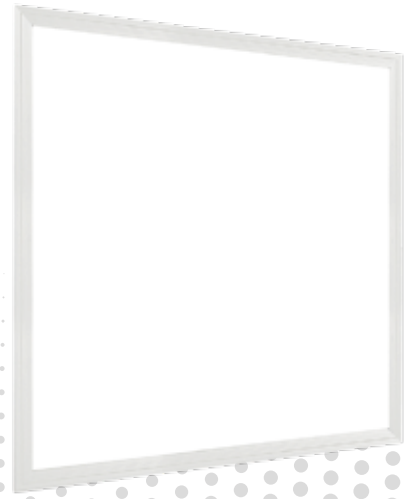

Warning

- Please read this manual carefully before starting the installation and store it for future reference.
- Do not cover the product with any objects when in use. The product is designed with enough heat dissipation and covering the product with any objects can prevent this, effecting its life span.
- Only an approved/ Qualified technician can open the lamp and carry out repairs if required.

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy?

We are so happy that you are pleased with our product. Feel free to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)1291 446 105 E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)