



DATASHEET

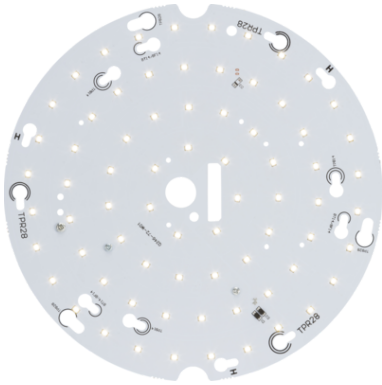

BPLED

14W LED Gear Tray

www.mlaccessories.co.uk



MLA PART CODE	BPLED
DESCRIPTION	14W LED Gear Tray
NET WEIGHT (KG)	0.6
FINISH	White
DIMENSIONS (MM)	Diameter - 246 Projection - 27
CONSTRUCTION	Construction - CEM-1
CLASS	II
WATTAGE (W)	14
LAMP TECHNOLOGY	SMD LED
LUMENS (LM)	1480
LUMEN TOLERANCE	5%
EFFICACY (LM/W)	107.6
CIRCUIT WATTAGE (W)	13.8
CCT	4000K
LIGHT COLOUR	Cool White
CRI	>80
SDCM	<6
RUNNING CURRENT (A)	0.064
DISPLACEMENT FACTOR	>0.9
SVM	0.001
PST-LM	0.029
BEAM ANGLE (DEGREES)	115
LIFE SPAN (HRS)	25,000
L70B50 LIFESPAN (HRS)	60,000
DIMMABLE	No
OPERATING TEMPERATURE	-5~50°C
INPUT VOLTAGE	230V 50Hz

DRIVER	DRIVER TYPE - Constant Current MAX. OUTPUT - 12W OUTPUT VOLTAGE - 0-26V OUTPUT CURRENT - 470mA POWER FACTOR - >0.9 EFFICIENCY FULL LOAD - 84.6 ISOLATION - SELV AMBIENT TEMPERATURE (Ta) - -5~50°C CASE TEMPERATURE (Tc) - 75°C
WARRANTY	3year(s)
MANUFACTURED IN ACCORDANCE WITH	BS EN 60598
ORIGIN OF MANUFACTURE	China
DECLARATION OF CONFORMITY (HELD ON FILE)	Yes
EAN	5055832969983

Date Created: 03/04/2023 13:06

