


Product Code: BABEDKIT

Luckinslive 434174104

Description: Alert, Pull Cord and Cancel Modules for Assistance Alarm Kit

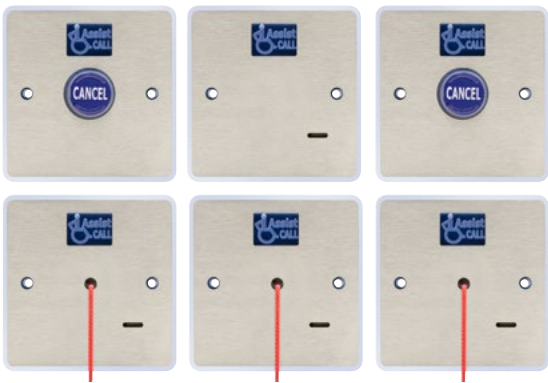

Component 1 Description

Quantity

BAPCM - Pull Cord Module

3

Component 2 Description

Quantity

BAM - Alert Module

1

General Information

Dimensions (mm)	86 x 86 x 22
Finish	Brushed Steel
Materials	Stainless Steel & Acrylic
Mounting	Surface or Flush
Weight (Kg)	0.6

Supply & Power

Cable Size (mm ²)	1 - 1.5
Connection Type	1 x 2 Core Radial

Programming

Adjustment Type	Pull Cord
-----------------	-----------

Communication

Maximum Communication Range (m)	500 (point to point)
---------------------------------	----------------------

Inputs & Outputs

Input Lines	1
Alarm Zone End of Line (Resistance)(Ω)	10k
Line Outputs	Single Line

Environment

Storage Temperature (°C)	
--------------------------	--

Component 3 Description

Quantity

BACM - Pull Cord Cancel Module

2

General Information

Dimensions (mm)	86 x 86 x 22
Finish	Brushed Steel
Materials	Stainless Steel & Acrylic
Mounting	Surface or Flush
Indication	Blue 'Halo'
Cable Size (mm ²)	1 - 1.5
Connection Type	1 x 2 Core Radial
Adjustment Type	Single Cancel Button
Maximum Communication Range (m)	500 (point to point)
Input Lines	1
Alarm Zone End of Line (Resistance)(Ω)	10k
Line Outputs	Single Line
Weight (Kg)	0.6

Warranty Years 2

Additional Information The kit requires the BA4ZM (Assistance Alarm 4 Zone Module) or Beacon Master Station to operate

Unit 7 Target Park, Shawbank Road,
Lakeside, Redditch B98 8YN United Kingdom
T: +44 (0)1527 515150 | F: +44 (0)1527 515143
E: info@espuk.com | W: espuk.com



CLICK OR SCAN

Catalogue



DoC



Installation



CLICK OR SCAN