

ENER-J®

Smart Home Living

Solar Sensor 3 Heads Wall Light



74 LED
Super Bright



500 Lm



6000 -
6500K



IP 65



PIR Sensor



2400mAh



Solar Power



Easy
Installation



Energy
Saving



270°
Lighting Area

SKU CODE:
T728

Ean Code on box:
5061004710284

Packing

Inner Qty
1pc pack

Outer Carton Packing Qty
12pcs/ctn

Features

- **74 LED Solar Light with 3 Heads:** The Solar Powered Light is equipped with 74 LED chips and 3 rotatable lamp heads (independently adjustable). Up to 270° lighting angle creates a larger range of luminosity. Bigger SMD 2835 LED Chips as compared to smaller ones, giving more brightness (500 lm) efficiency.
- **PIR Motion Sensor with 3 Lighting Mode:** Built-in a sensitive body motion sensor and a low light sensor, the solar lights can detect people's movement easily. (Distance up to 26FT/8M and 120° sensing angle). Also, it has 3 lighting modes adjustable (High Light, Stay-on Light and Dim Light mode), meeting your need in various conditions. The Sensor modes are controllable from the device & the wireless remote (included).
- **IP65 Waterproof Outdoor Light:** Our Security light has an IP65 waterproof rating, it provides perfect protection for the device to work properly and durably in extreme weather conditions (Rain, Snow, Freeze, etc).
- **Green Power and Easy Installation:** Built-in 2400mah lithium rechargeable battery, converts solar power into electricity, no wire needed, charges even at low sunlight, no pollution & electricity bill. With the benefit of its compact design, this solar floodlight is ideal for sidewalks, front doors, yards, walls, gardens, garages, etc.

Technical Parameters

Solar Panel	Polycrystalline Silicon 5.5V 2W 13.7x8cm
Sensing Distance	Up to 8m/26ft, 120°
Product weight	396g
Product size	28x14.5x13cm
Battery	18650 2400mAH
Color Temp	6000-6500K
Light Source	2x26SMD2835+22SMD, (Total 74), Support 90 degree adjustment for left and right head
Luminous Flux	500lm
Charging Time	12H
Working Time	4H
IP Rate	IP65
Material	ABS




Package included

1. Solar Sensor Wall lights
2. Screws*3pcs
3. Expansion screws*3pcs
4. User manual*1
5. Remote controller*1



Automatically turns off and charging during the day

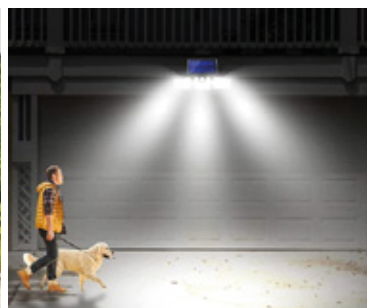


Turn on when it senses movement at night




If movement stay active the light will remain on



Turn off after 30 seconds of no movement

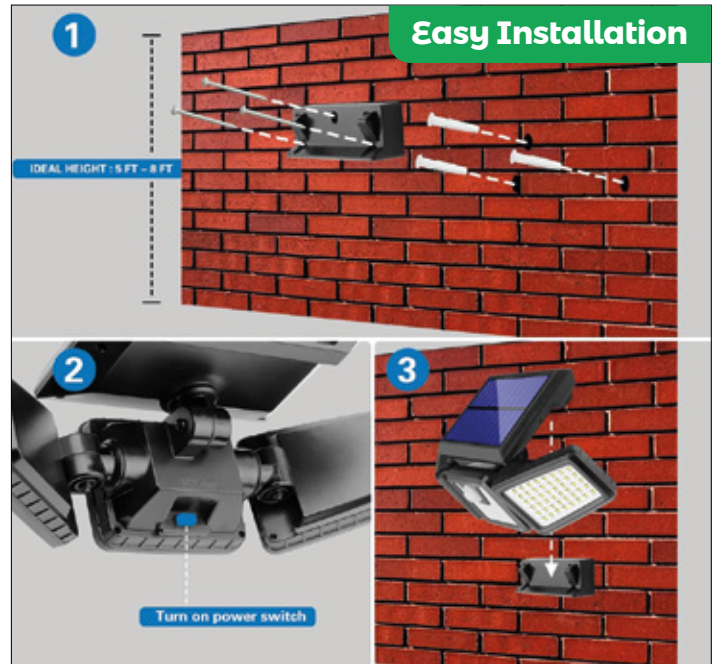

Control with Wireless Remote:

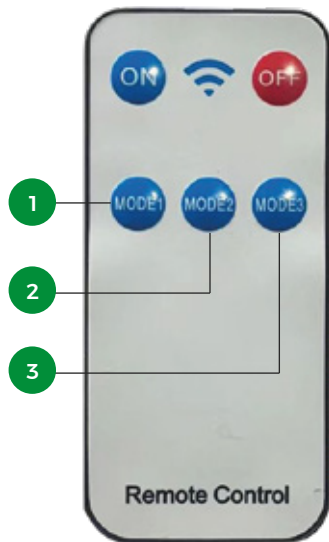

- 1** **MODE1**
Constant 100% brightness (in dark)
- 2** **MODE2**
30% brightness in dark but turns to 100% brightness on motion detection and back to 30% brightness after 30 seconds
- 3** **MODE3**
100% brightness on motion detection for 30 seconds.

Thank you for choosing ENER-J!

Customer satisfaction is our TOP priority, please let us know how you felt about your experience. Happy?

We are so happy that you are pleased with our product. Feel free to express your newfound joy! Share your experience by writing a review.

Not Happy? If you are not fully satisfied with the item you received, have any problems like damages, or questions, please contact us. We typically respond within 24-48 hours.

Stuck? Confused?

Contact our Technical Support team on:

T: +44 (0)1291 446 105 E: support@ener-j.co.uk

Lines are open Mon - Fri (8am to 4pm)