


Product Code: BRAP

Description: Disabled Refuge Remote Alarm Panel

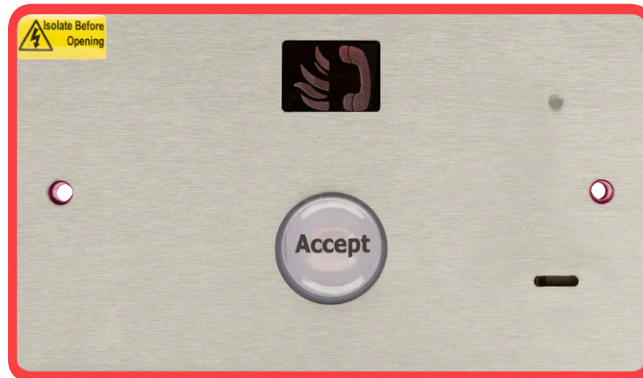

General Information

Dimensions (mm)	146 x 86 x 27
Finish	Brushed Steel
Materials	Stainless Steel & Acrylic
Mounting	Surface or Flush
Weight (Kg)	0.60
Warranty (Years)	2

Supply & Power

Operating Voltage (V AC)	230
Frequency (Hz)	50/60
Cable Size (mm²)	1 - 1.5
Connection Type	Connects to the In-Use Relay located inside the Beacon Master Station

Programming

Adjustment Type	Single "Accept" Button
------------------------	------------------------

Outputs

Relay Outputs	Volt free, NO & Common
Line Outputs	Single Line; to go to Master Station's Line

Standards EN55103-1, EN55103-2

Features

Provides a compact and stylish solution when the Master Station is located in a non-staffed area
 A Relay Contact is Provided Which can be Used to Cascade Panels or to Provide an Additional Volt Free Contact for BMS or Fire Alarm Notification.
 Fits onto a Standard 2-Gang Backbox (not included)

