


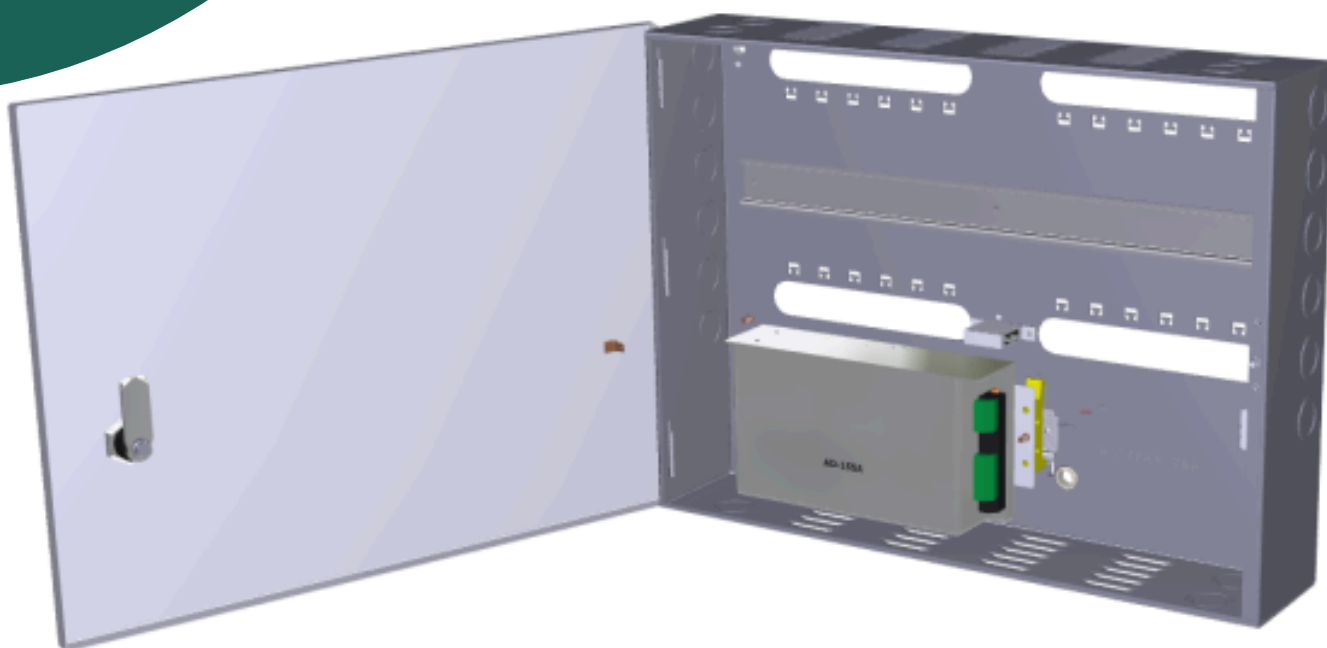

Door Entry < Control Equipment < Accessories

Small Case

ref. CASE2

- Neat installation
- Flexible mounting options
- DIN rail
- Large range of cable knockouts
- Tamper Switch
- Lockable and Removable door for an easy access

Overview

The Small Case includes a 12V 3.5AMP buffer switch mode PSU. It is a metal enclosure that has been designed to make the installing of IPassan equipment simply. It allows for easy access and maintenance of the installation. It also greatly reduces time on site as part of the cabling may be prepared in advance. This Small Case is dedicated to 2 IPassan modules and offers flexible mounting options (2 controllers or 2 I/O modules or 1+1). You can also use the Small Case for 2Voice door entry or combined door entry and access control equipment.

Specifications

Colour	RAL 9003 White
Material	Powder Coated 1mm Steel
Dimensions	H342mm x W456mm x D100mm.
Ingress Protection (IP) Rating	IP50
Power supply	13.8VDC 3.5A
Battery back up	Yes

Design

Thanks to its robust design, the enclosure is effortless to mount and maintain. Many knockouts are available for a more convenient field wiring. Ventilation holes also enable a proper air flow inside the box. Space is provided above and below modules for finger trunking or cable tie points. This ensures a neat and secure wiring. Keyway holes enable an easy wall surface mount whereas spacers on the back leave enough space for cables to come out.

Power Supply

The small enclosure includes a 13.8VDC -3.5A switch mode power supply to power up to 2 IPassan complete modules (controllers or I/O) and a 7 A/h battery. Please note the battery is not supplied with the metal enclosure.