


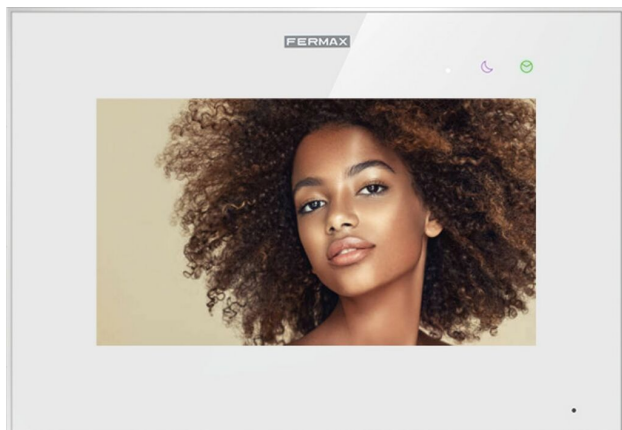

Product Code

F01572

7" WAY-FI PLUS KIT MONITOR

Reference

1572

EAN

8424299015729

Description.

Description

MAIN FEATURES

- Installation of **2 non-polarized wires** .
- **Compatible** with Smart speakers and screens: **ALEXA and GOOGLE HOME** , to receive call notifications on the speaker or smart screen and be able to speak, view the image and use **voice commands to open the door** . With GOOGLE HOME the door opening command only activates the main door.
- **Simple pairing process using QR Code** .
- **Capture** and view **photos/videos** from the monitor or mobile.
- **Integration with FERMAX Wifi IP cameras ref. 9986** (viewing from monitor and mobile. Motion detection alarms).
- Activation of **additional function F1** from the monitor or the APP.
- **Call from APP to home** (with listening mode option).
- **Intercommunication between monitors** of the same home.

EXTENSIONS

- 5 additional monitors (6 in total).
- **CAMERAS (ref. 9986)** : up to 4 Wifi IP cameras in total per installation.

Technical Details

MONITOR. Ref 1572

- Call forwarding to mobile: unlimited number of mobiles that can be paired. Possibility of selecting on the monitor whether the call rings at the same time on the monitor and on the smartphone or first on the monitor and then on the smartphone (programmable delay time 5-25 s.). Diversion can also be deactivated from the monitor.
- Mounting: Surface (wall connector included)
- Screen: 7" capacitive touch screen (16:9 widescreen format). Resolution 1024 x 600 pixels. Wide angle of visibility (IPS technology). Intuitive user interface supports swipe operations.
- Leds: White: monitor activated; Purple: Do not disturb On; Green: Photos/Videos pending viewing
- Talk mode: Hands-free
- Doorbell connections: GND, BELL terminals
- Connections for activation of auxiliary device: terminals GND, F1
- Date and time: Time: 12/24h format; Date: configurable format. Configurable manually or synchronized from the internet.
- Do not disturb mode: Immediate and/or timed activation/deactivation for a time slot of the day.
- Photo Capture: Automatic-Disabled (disabled by default) and Manual. 200 photos without Micro SD card, 5,000 with Micro SD (depending on SD size). Photos on the monitor can be copied to Micro SD card.
- Video Capture: Automatic-Disabled (disabled by default) and Manual. 20 videos without Micro SD card, 5000 with Micro SD card. SD size: 8-128 GB, not included in the kit. 15 second videos.
- Deleting photos and videos: One by one, select several, select all. When you reach the storage limit, delete the oldest ones. Option to format the Micro SD. Deletion after 30 days is activated by default.
- Photo and video gallery (with date and time).
- Auto-on: visualization of the outdoor from the monitor, with the possibility of switching between outdoor panel/camera.
- Pedestrian door opening (electric door opener): Activates 12 Vdc output. Programmable opening time (1-10 s.)
- Garage door opening (electromagnetic door opener): Activates relay. Programmable opening time (1-10 s.)
- Image settings: Brightness.
- Call and talk volume adjustment: levels from 0-8.
- Internal intercom function in the home: Only between monitors (not with smartphones). Possibility of calling one or calling all. Maximum up to 6 monitors per home (1 Main and 5 Additional)
- Menu languages: 17
- Call melodies: 16. Selectable for: panel call, door bell, intercom call, motion alarm, tamper, call from app.
- Compatibility with analog CCTV cameras: No
- Compatibility with FERMAX Wifi IP CCTV cameras ref. 9986: up to 4 cameras per installation. Not compatible with other camera models.
- Connections: Bus (B, B); Doorbell (GND, BELL); Auxiliary activation (F1, GND). Micro SD card slot (8-128 GB).
- Configuration from menu, without DIP-switches.
- Firmware update via SD or OTA (internet).

Details.

Product measurements (height x width x depth) mm	Weight (kg)	Packaging measurements (height x width x depth) cm	Video Door Entry system
154 x 222 x 11,5	0.5571	3,5x28,4x19,8	Technologie WAYFI PLUS

Declaration of conformity

- [DOCF01572EN.pdf](#)

Accessories



F09986

IP AUXILIARY CAMERA WITH WIFI



F01570

WAY-FI PLUS P.S.U. DIN8 32VDC-3.5A



F01571

1W VIDEO WAY-FI PLUS 7" KIT



F01573

1W WAY-FI PLUS VIDEO KIT PANEL